


TECHNICAL RIDER **NO MY PRESIDENT**

Aufstellung auch spiegelverkehrt möglich

2m tief

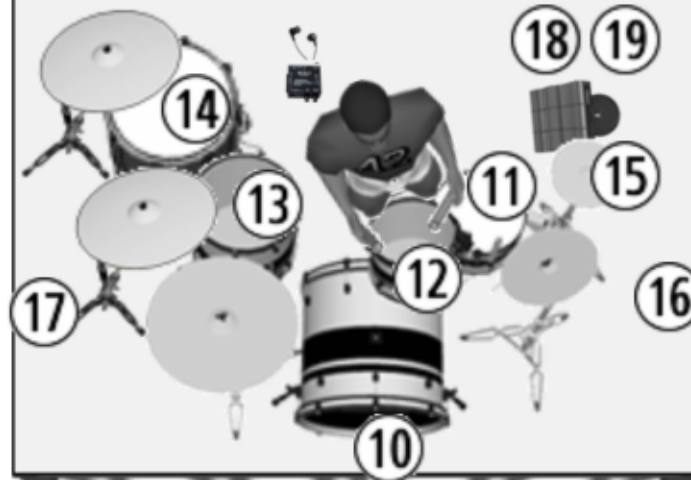

Riser, falls möglich: 2,50m breit



INPUT LIST

BÜHNENSTROM

MONITOR, DI, Sonstiges

1. Lead Vox (wireless) Dry
2. Lead Vox Efx only (Harmonies, Doublings...) *
3. Guitar Combo I (1x12 w/Efx)
4. Guitar Amp II (2x10 w/Efx)
5. Bass Amp III (regular Bass)
+ ggf. 6.: aktive DI
- 6.+7. Keys L/R
- 8.+9. Synth L/R
10. BD w/Hole 22"
11. SD 14x6,5"

12. Racktom 13"
13. Floortom 16"
14. Gongtom 20" (no Reso)
15. HH
- 16.+17. OH L/R
- 18.+19. SPD SX Sample Pad L/R

*gleicher Pegel am Pult

- Lead Vox : 1x230V
 Keys (6.+7.): 1x230V
 Bass: 1x 230V
 Drums: 1x230V

- Band bringt:*
- Vocal Mic Funkstrecke
 - 1x In Ear Funkstrecke Lead Vox (Drums + Keys kabelgebunden, bevorzugt Stereo)
- zusätzlich benötigt:*
- In Ear Sender+Empfänger Stereo oder Mono f. Bass, alternativ Wedge
 - Stereo DI Synth (8.+9.)
 - Stereo DI f. SPD SX Sample Pad (18.+19.)